
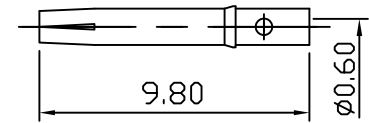
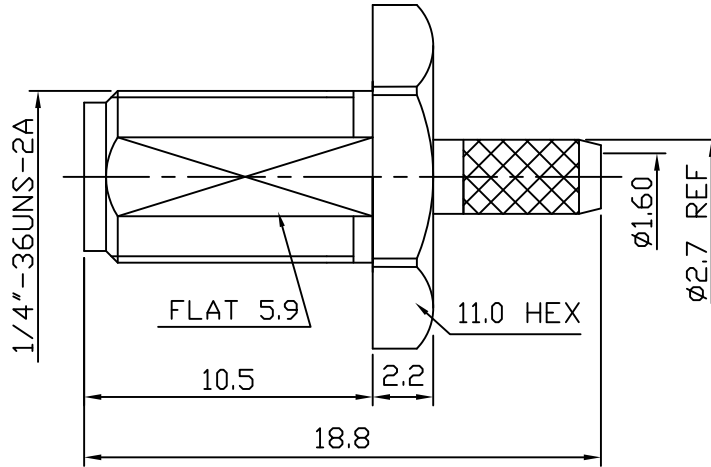





1 2 3 4 5 6 7 8

REVISION		
ISS	ZONE	DESCRIPTION
A-1	C-7	φ3.9 WAS φ4.0
A-2		設計變更
A-3		設計變更 (RD990619)




NOTE:

- 1.Impedance: 50Ω
- 2.Frequency Range: DC 0-18 GHz
- 3.VSWR: 1.2 MAX. @ 6 GHz
- 4.Voltage Rating: 335V rms
- 5.Contact Resistance: Center Contacts: 2 mΩ Max
Outer Contacts: 2 mΩ Max
- 6.Insulation Resistance: 5000 MΩ MIN.
- 7.Interface in Accordance With: MIL-STD-348A
- 8.Operating Temperature Range: -65~165°C
- 9.RDHS Compliance.

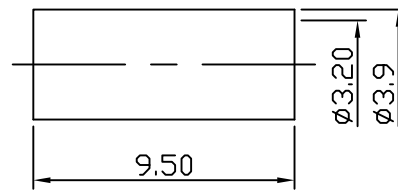

MOUNTING HOLE



STRIPPING DIMENSION

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWN NO.
7	FERRULE	BRASS	GOLD	1	M-0021
6	CENTER CONTACT	Be Cu	GOLD	1	C-0197
5	BODY	BRASS	GOLD	1	B-0317
4	INSULATOR	TEFLON	NONE	1	T-0158
3	O-RING	SILICON	NONE	1	R-0003
2	WASHER	BRASS	GOLD	1	G-0017
1	NUT	BRASS	GOLD	1	D-0008

TOLERANCES			
DIMENSIONS ARE IN MILLIMETER			
UNLESS OTHERWISE SPECIFIED			
.X	±0.2		
.XX	±0.1		
.XXX	±0.05		
ANGLES	±5°		

TITLE
SMA JACK BULKHEAD CRIMP
PART NO.
19-09-174U-50Ω
DRAWN NO.
19-0016
FILE PATH:

SOCAA CORP.,LTD.	
(Solution Of Connector & Antenna)	
APPROVED	DATE
CHECKED	DATE
DRAWN	DATE

1 2 3 4 5 6 7 8